


**Kit ECOCALOR codice ECO 10/7/C** (spray booth for internal dimensions max mm 7200x4100x2950h)

<i>Code</i>	<i>Description</i>
<u>ECO 10/7/C</u> 40,5 Kw	N.08 Panel medium dim.mm 2385x708x39 da 3Kw cad. N.02 Panel medium dim.mm 2385x708x39 da 3Kw cad. with probe
QC	N.06 Top panel dim. mm 2385x310x39 da 1,5Kw cad. N.01 Top panel dim. mm 2385x310x39 da 1,5Kw cad. with probe
CE	Cyclic touch screen control panel with PLC, reduces the absorption of 50%.
ECP300	Kit material and electrical wiring
ECP400	Protex Protective film H.cm.210 my.12
<u>Optional fot kit:</u>	Infrared Thermometer for measure the temperature
ECP300	Protex Protective film H.cm.210 my.12

**Selling this kit ECO 10/7/C is recommended in the geographical areas where the temperature is never below 5 ° c.**

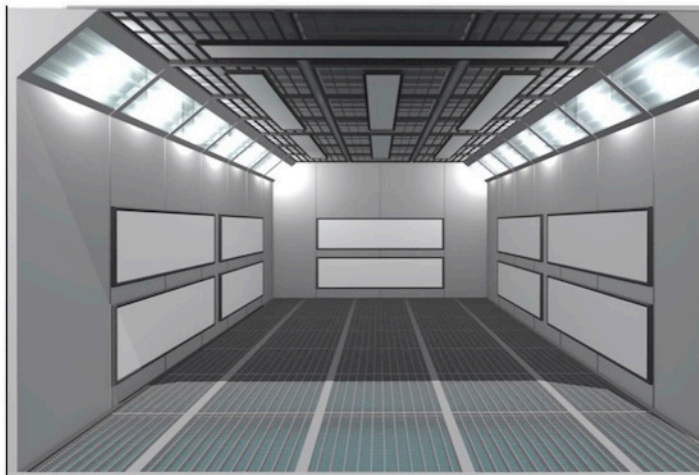

Cyclic touch screen control panel with PLC, **reduces the absorption of 50%.**

Protex Protective



Infrared Thermometer

