


Kit ECOCALOR codice ECO 10/7/HTC (spray booth for internal dimensions max mm 7200x4100x2950h)

<i>Code</i>	<i>Description</i>
ECO 10/7/HTC 51 Kw	N.08 Panel medium dim.mm 2385x708x39 da 3Kw cad.
	N.02 Panel medium dim.mm 2385x708x39 da 3Kw cad.with probe
QC	N.06 Panel HT high temperature dim. mm 2700x200 da 3Kw cad.
	N.01 Panel HT high temperature dim. mm 2700x200 da 3Kw cad. with probe
CE	Cyclic touch screen control panel with PLC, reduces the absorption of 50%.
ECP300	Kit material and electrical wiring
ECP400	Protex Protective film H.cm.210 my.12
ECP400	Infrared Thermometer for measure the temperature
<i>Optional for kit:</i>	
ECP300	Protex Protective film H.cm.210 my.12

Selling this kit ECO 10/7/HTC is recommended in geographical areas where the temperature is very cold up to -20 ° c.

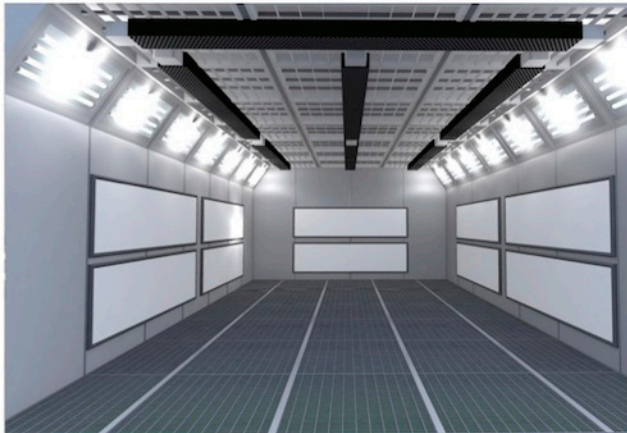

Cyclic touch screen control panel with PLC, **reduces the absorption of 50%.**

Protex Protective



Infrared Thermometer

